


ECOtru®

You'll see the light with the ECOtru® New Construction and replacement windows. This attractive and high quality window is ideal for any new construction project. Stylish, yet sturdy, this window is designed to give your home reliability, comfort and give you the perfect view.



www.windowEstore.com

Strength that Performs

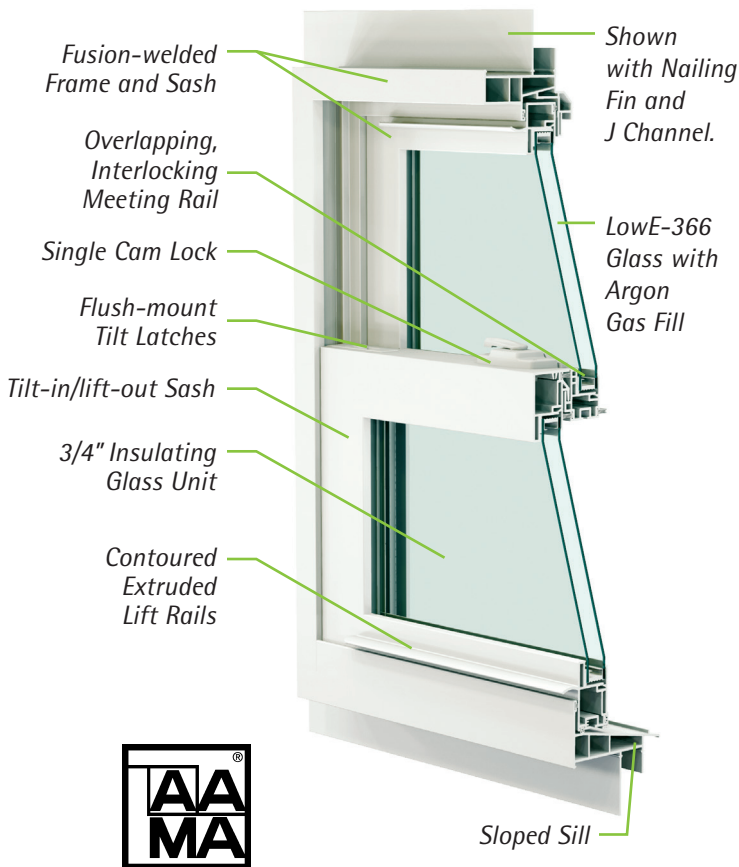

AAMA GOLD LABEL CERTIFICATION
Highest level of testing for quality and performance



Energy Star Windows and Patio Doors




Energy Star Windows/Patio doors:

- Use less energy
 - Save money
 - Help protect the environment
- Visit www.energystar.gov for more information on qualified windows/doors and tax credit

Styles to Fit Any Decor

ECOtru® New Construction and replacement windows have a vast assortment to select your style: Single Hung, Double Hung, Slider, 3-lite Slider, Casement, Awning, Picture Window, Geometrics and Patio Door.

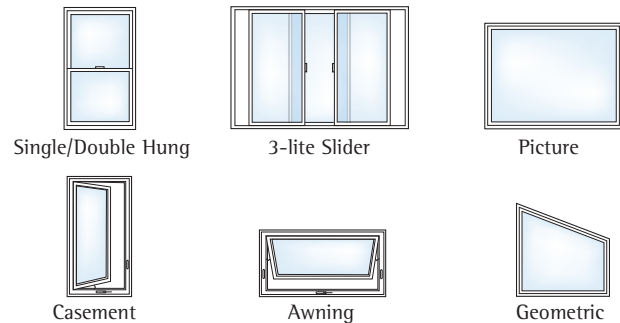


Colors and Grid Style Options



Shed some light on your home's unique character and decor with the ECOtru collection of grids.


■ **Colonial Grids**
Flat White, Tan or Driftwood and Sculptured White, Tan, Driftwood or Brass



Colonial Diamond

■ **Diamond Grids**
Flat White, Tan or Driftwood

■ **Prairie and Perimeter (single/double) Grids** - Flat White, Tan or Driftwood and Sculptured Flat White, Tan, Driftwood or Brass.



Prairie Perimeter

■ All grids come in standard 5/8" width. Sculptured grids available in 1" width

Standard Features and Options

ECOtru® Window

REPLACEMENT PROTECTION

Lifetime Limited Warranty

- Lifetime Vinyl
- Lifetime Hardware
- Lifetime Insulated Glass Unit
- Lifetime Screen
- 20 Year Glass Breakage

PERFORMANCE

DP Rating:	44 x 63 - DP35 36 x 74 - DP50
U-Value	.30 +/-
SHGC	.21 +/-
Certifications:	AAMA Gold (Air, Water, Structure, FER, Thermal)

GLASS

Standard Glazing:	LowE/Argon Gas Fill
IG Thickness:	3/4"
Glass Pane:	Dual
Spacer Type:	Intercept Spacer
Glass Strength:	Double
Glass Options:	Obscure or Tempered

FRAME

Frame Construction:	Fusion Welded
Frame Thickness,	
Outer Walls:	0.072
Frame Width	2-15/16"
Frame Profile:	Beveled
Sill:	10-degree Sloped
Weep System:	Tank System and Covered Weeps
Profile:	Multiple Chambered

SASH

Sash Construction:	Fusion Welded
Sash Thickness,	
Outer Walls:	0.072
Equal Lite:	Yes
Edges:	Squared
Interlocks (Meeting Rail):	Overlapping, Interlocking Full Interlock
Lift Rail:	Integral
Operation:	Tilt In/Lift Out

HARDWARE/ACCESSORIES

Tilt Latches:	Flush
Type of Lock:	Cam Action Lock
No. of Locks:	Two Standard ≥ 28 "
Balance System:	1/2" Stainless Steel Constant Force
Standard Screen:	Half Screen
Screen Option:	Full
Screen Cloth:	Fiberglass
Screen Frame:	Rollformed Aluminum or Optional Extruded

WINDOW  STORE
www.windowEstore.com

Toll Free
855-290-6366

Austin, TX 78757

PATIO DOORS TO BROADEN YOUR VIEW



Broaden your view and open your home with ECOtru® new construction patio door. They'll give you a brilliant new perspective and a custom design to your home.